

## RAH Series



### Roof Access Hatch

**Roof Access Hatches** are designed to provide convenient, cost saving access to the roofs of buildings, allowing for ladders and stair access to the roof from the interior of the building. Elmdor Roof Access Hatches are designed and engineered for durability and safety, with ease of installation. The Roof Access Hatches install easily over the roof opening and are secured from the base flange to the roof.

**Curb construction** shall be 14 gage (G90) galvanized steel with durable recoatable gray primer finish. It shall be 12" in height with a 3-1/2" wide mounting flange with mounting holes for roof attachment.

**Cover** is 14 gage (G90) galvanized steel with radius corners for safety and shall be fully welded at the corners for watertight construction.

**Latching** shall include interior handle, exterior handle and provisions for a padlock, both inside and out.

**Hardware** shall include an automatic, hold-open arm with vinyl grip and compression springs encased in telescopic tubes for smooth door operation.

### Guide Specification

Provide Elmdor RAH series, Roof Access Hatch (specify model number and options). Roof hatch shall be fabricated from 14 gage (G90) galvanized steel on both curb and cover. Compression springs encased in zinc-plated telescopic tubes shall be provided for smooth operation of the cover. An automatic hold-open arm with vinyl grip will be furnished. Latching shall include both interior and exterior handles with provisions for a padlock both inside and out.



Member of U.S. Green  
Building Council

RAH

Revised: 3/24/09



**MODEL NUMBER AND OPTIONS SELECTION**

**BASE MODEL NUMBER**

RAH Roof Access Hatch


**Suffix Options**

- CM Curb Mount  
 - F FESCO

**STANDARD AVAILABLE SIZES**

Special sizes available upon request.

NOMINAL DOOR SIZE (W X H)	FRAME INNER DIMENSION (W X H)	FRAME OUTER DIMENSION (W X H)	ROOF OPENING DIMENSION (W X H)	WEIGHT
E-24" x 24" -RAH-W	24" x 24"	31" x 31"	24" x 24"	84 lbs.
E-24" x 30" -RAH-W	24" x 30"	31" x 37"	24" x 30"	103 lbs.
E-24" x 36" -RAH-W	24" x 36"	31" x 43"	24" x 36"	124 lbs.
E-30" x 30" -RAH-W	30" x 30"	37" x 37"	30" x 30"	129 lbs.
E-30" x 36" -RAH-W	30" x 36"	37" x 43"	30" x 36"	155 lbs.
E-30" x 54" -RAH-W	30" x 54"	37" x 61"	30" x 54"	233 lbs.
E-30" x 96" -RAH-W	30" x 96"	37" x 103"	30" x 96"	413 lbs.
E-36" x 36" -RAH-W	36" x 36"	43" x 43"	36" x 36"	185 lbs.
E-36" x 48" -RAH-W	36" x 48"	43" x 55"	36" x 48"	248 lbs.
E-48" x 48" -RAH-W	48" x 48"	55" x 55"	48" x 48"	330 lbs.

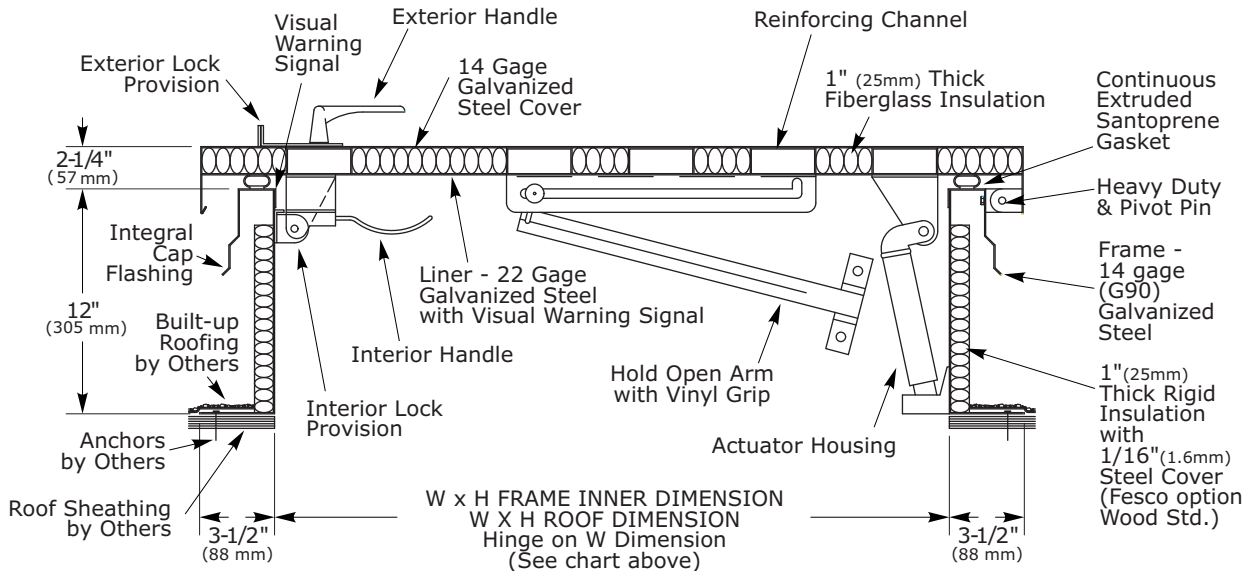

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit [www.elmdorstoneman.com](http://www.elmdorstoneman.com) for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options \_\_\_\_\_ Quantity \_\_\_\_\_  
 Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Title \_\_\_\_\_  
 Approval for Manufacturing/Signature \_\_\_\_\_

**RAH**

Revised: 3/24/09