

**ATWT Series**



---

**Airtight/Watertight Door**

Elmdor® Airtight/Watertight Access Doors are manufactured and engineered to provide access to exterior applications ensuring years of protection against outdoor elements. Our new technology helps to manifest resistance to water and vapor. Our Airtight/Watertight Door includes a neoprene gasket on four sides.

**Door** is fabricated from 16 gage, galvanized steel with a prime coat white finish. Optionally available with 1" thick Foil Faced Insulation.

**Frame** is fabricated from 16 gage, galvanized steel with a prime coat white finish and provided with slotted holes and gasket.

**Hinge** is a continuous stainless steel piano hinge, allows the door panel to open 180° for easy access.

**Exterior latch** is screwdriver operated.

**Finish** is a prime coat suitable for painting.

**Guide Specification**

Provide Elmdor® ATWT Series, Airtight/Watertight Door (specify model number and options). Access door frame shall be fabricated from 16 gage galvanized steel with a prime coat white finish and provided with slotted holes. Access door panel shall be fabricated from 16 gage galvanized steel with a prime coat white finish. Door is provided with a neoprene gasket on four sides. Access door shall have a continuous piano hinge with exterior screwdriver operated latch.



**MODEL NUMBER AND OPTIONS SELECTION**

**BASE MODEL NUMBER**

ATWT Airtight/Watertight Door

**Suffix Options**


- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter (one per door)
- FFI 1" (25mm) Foil Faced Insulation (Door)
- MAS Masonry Anchor Straps Attached
- MLP Mortise Lock Prep
- NLH Non-Locking, Two-Position Handle

**STANDARD AVAILABLE SIZES**

Special sizes available upon request.


WALL OPENING (W x H) INCHES (mm)	LATCHES	WEIGHT lbs (kg)
8" x 8" (203 x 203)	1	4.25 (1.92)
10" x 10" (254 x 254)	1	5.25 (2.38)
12" x 12" (305 x 305)	1	6.75 (3.06)
14" x 14" (356 x 356)	1	8.25 (3.74)
16" x 16" (406 x 406)	1	10.00 (4.53)
18" x 18" (457 x 457)	1	12.00 (5.44)
20" x 20" (508 x 508)	1	14.00 (6.35)
24" x 24" (610 x 610)	2	18.50 (8.39)
24" x 36" (610 x 914)	2	26.00 (11.79)

WALL OPENING (W x H) INCHES (mm)	LATCHES	WEIGHT lbs (kg)
24" x 48" (610 x 1219)	3	35.00 (15.87)
30" x 30" (762 x 762)	4	26.75 (12.13)
30" x 36" (762 x 914)	4	31.00 (14.06)
30" x 48" (762 x 1219)	5	42.00 (19.05)
30" x 60" (762 x 1524)	5	50.00 (22.68)
36" x 36" (914 x 914)	4	36.00 (16.32)
36" x 48" (914 x 1219)	5	48.00 (21.77)
36" x 60" (914 x 1524)	5	58.00 (26.30)
36" x 78" (914 x 1981)	5	75.00 (34.02)

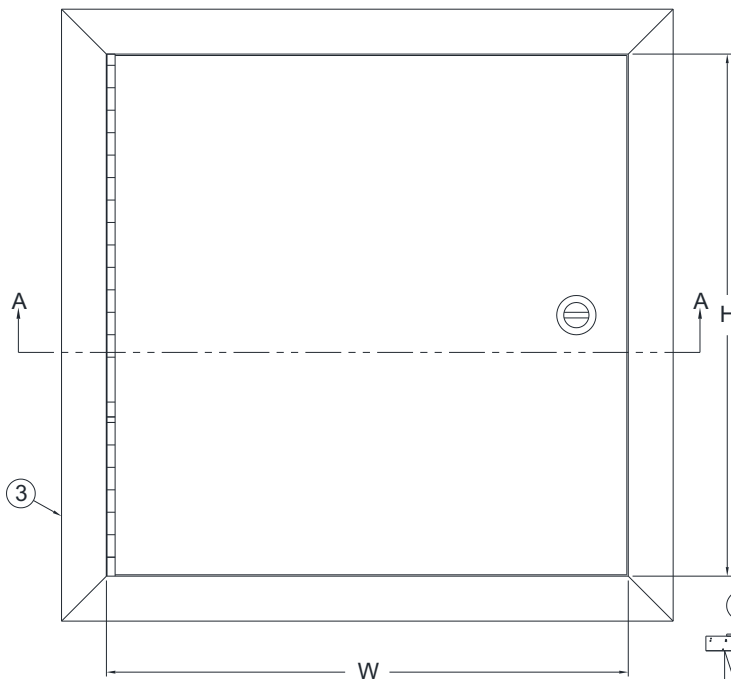

- NOTES:
1. CONTINUOUS PIANO HINGE
  2. DOOR
  3. FRAME
  4. SCREWDRIWER OPERATED LATCH
  5. 3/16" x 3/8" SLOTTED MOUNTING HOLES
  6. 1/8" x 1/2" GASKET

**NET OPENING = WIDTH MINUS 1-1/2" (39mm)  
HEIGHT MINUS 1-1/2" (39mm)**

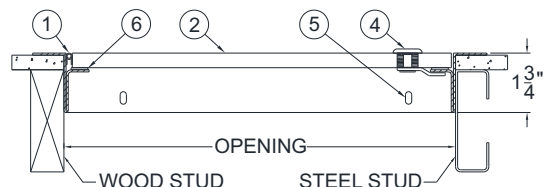

SECTION A-A  
NOT TO SCALE

**⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov**

Dimensions are subject to manufacturer's tolerance of plus or minus 1/4". Elmdor/Stoneman assumes no responsibility for use of void or suspended data. Please visit [www.elmdorstoneman.com](http://www.elmdorstoneman.com) for most current specifications. © Copyright 2009 Elmdor/Stoneman, City of Industry, CA, A Division of Acorn Engineering Company.

**SELECTION SUMMARY & APPROVAL FOR MANUFACTURING**

Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

**ATWT**

Revised: 07/08/20